

10/531901

PCT/IB 03 / 04 601

17.10.03

Rec'd PCT/PTO 18 APR 2005



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 23 OCT 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079383.2

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 02079383.2
Demande no:

Anmeldetag:
Date of filing: 21.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Hydrogen storage material with high storage capacity

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H01M/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE-BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Hydrogen storage material with high storage capacity

The present invention relates to a hydrogen storage material, comprising magnesium hydride. The invention also relates to an electrochemical cell comprising such a hydrogen storage material.

5 Rechargeable batteries can be discharged and then restored to their original state for re-use. Rechargeable batteries are increasingly used in portable electronic equipment such as telephones, walkmans and computers. A known type of rechargeable battery is the so-called rechargeable metal hydride battery, which has a relatively high storage capacity per unit volume. An example of such a metal hydride battery is a battery comprising LaNi_5 as the electrochemically active material, more specifically as a negative electrode. In the discharged
10 condition, the negative electrode comprises LaNi_5 , while in the charged condition hydrogen is absorbed by said electrode, resulting in LaNi_5H_6 . A disadvantage of this type of battery is the relatively low storage capacity per unit weight. The latter is caused by the high density of the metal hydride, which is about 7 g/cm^3 .

For some time now research has been directed to suitable metal hydrides with
15 a lower density that can act as a hydrogen storage material. In theory, magnesium is very suitable for hydrogen absorption as it can store large amounts of hydrogen. Magnesium can reversibly store up to 7.65 weight % of hydrogen, making it a very suitable candidate for hydrogen storage for fuel cell applications. However, the temperature at which the magnesium can be charged and discharged is 400°C . The kinetics for hydrogen exchange at
20 temperatures below 400°C are very slow due to slow diffusion of hydrogen in the magnesium hydride.

Magnesium-nickel alloys appear to be better candidates for hydrogen storage material that can be used in electrochemical cells, as these alloys can be used for hydrogen absorption at lower temperatures.

25 The use of magnesium-nickel hydride for hydrogen storage is also disclosed in JP-56114801. According to the latter publication, said material can store hydrogen in a stable way at high temperatures. Although magnesium-nickel hydride can absorb a relatively large amount of hydrogen, it is as such not suitable as an electrochemically active material in an

electrochemical cell. One of the reasons for this is the relatively slow kinetics of hydrogen absorption and hydrogen release.

In order to improve the kinetics of hydrogen absorption and hydrogen release to a sufficient level and to restrict corrosion, the amount of nickel added to a magnesium-nickel alloy has to be so high that only a small improvement is obtained in comparison with the known LaNi_5 material.

The present invention aims to provide a hydrogen storage material which can be applied in an electrochemical cell, which comprises a magnesium hydride and which has a high storage capacity per unit weight.

To this end, the present invention provides for a hydrogen storage material as defined in the preamble, which is characterized in that the magnesium hydride is stabilized in the fluorite structure.

The present invention is based on the insight that the slow diffusion of hydrogen in magnesium hydride is mainly due to the structure of the magnesium hydride, namely the rutile structure. Although hydrogen does not diffuse fast in said rutile structure, it diffuses fast in calcium fluoride-hydride which has the fluorite structure. By stabilizing magnesium hydride in the fluorite structure a fast diffusion of hydride ions therein can be obtained. Said fast diffusion is possible due to the presence of large empty octahedral sites in the fluorite structure through which the ions can move with high mobility. As a result of the improved fast diffusion of hydrogen in magnesium hydride with fluorite structure, the magnesium hydride can very easy be charged and discharged with hydrogen at room temperature. As a result, said magnesium hydride can advantageously be used as hydrogen storage material in electrochemical cells.

In particular, the magnesium is at least partially substituted by an element such that the magnesium hydride is stabilized in the fluorite structure.

By using a suitable element, the hydride of which has a fluorite structure, such element can form a solid solution with magnesium hydride between 20 and 80 mole % magnesium.

The element that is used to substitute the magnesium preferably comprises an ion with a size that is similar to the size of Mg^{2+} in VIII coordination.

In an advantageous embodiment, the element comprises an ion with a radius in the range of 0.090-1.120 nm.

Particular preferred elements comprise the ions selected from the group comprising Sc^{3+} , RE^{3+} (Rare Earth elements), Y^{3+} , Li^+ , Zn^{2+} , Co^{2+} , Fe^{2+} , Mn^{2+} , In^{3+} , Zr^{4+} , and Hf^{4+} .

For example, scandium hydride has the fluorite structure and forms a solid solution with magnesium hydride between 0 and 80 mole % magnesium. Upon depletion of hydrogen from such a solid solution a phase transition to a different structure is observed. XRD simulations show this structure to have a XRD pattern identical to a sphalerite structure. It has the same arrangement of metal ions as the fluorite structure as well as the empty octahedral sites.

In order to improve the hydrogen exchange kinetics, the hydrogen storage material preferably comprises an amount of a catalytically active material.

Preferred examples of such catalytically active material comprise catalysts from the group consisting of Ir, Ni, Pd, Pt, Rh and Ru.

Even more preferred as catalytically active material are Palladium and Rhodium.

Furthermore, the present invention relates to an electrochemically active material that is characterized in that the material comprises a hydrogen storage material according to the present invention as described above.

The hydrogen storage material according to the present invention can advantageously be used in fuel cells.

The invention also relates to an electrochemical cell comprising a negative electrode. Said electrochemical cell is characterized in that the negative electrode comprises a hydrogen storage material as described above.

The electrochemical cell preferably comprises a rechargeable battery.

Finally, the present invention relates to electronic equipment powered by at least one electrochemical cell. Said electronic equipment is characterized in that the at least one electrochemical cell is an electrochemical cell as described above.

The present invention is illustrated by the following example as well as the figure, which are given by way of example only.

Example 1

Magnesium hydride in the fluorite structure, wherein part of the magnesium is substituted by scandium is prepared by melting weighed quantities of the magnesium, the scandium and - if desired - a catalyst in a sealed molybdenum crucible.

5 The crucible was placed in a quartz tube, which was placed in a tube furnace. Before the melting process was started, the air inside the quartz tube was replaced by purified argon, to avoid oxidation of the molybdenum bomb.

10 The sample was heated to about 100°C above the liquids for one night. After heating, the quartz tube was submerged in a water bath, to "quench" the sample. Next, the sample was annealed at 450°C for 4 days. Last, the molybdenum bomb was removed, by mechanical milling.

The energy capacities of the materials according to the present invention are considerable. For example, $Mg_{65}Sc_{35}Pd_{2.4}H_x$ has a storage capacity of 1225 mAh/g, while $Mg_{80}Sc_{20}Pd_{2.4}H_x$ provides for a storage capacity of 1450 mAh/g.

15 Fig. 1a provides a schematic drawing of the hydrogen depleted sphalerite structure, while Fig. 1b gives a schematic drawing of the fluorite structure. The smaller spheres in Fig. 1a,b are metals, in this case magnesium and scandium. The larger spheres are the hydride ions. The metal ions have a size of 0.102 nm, while the hydride ions have a size of 0.14 nm. Fig. 1 clearly shows the large empty octahedral sites in the fluorite structure
20 through which the hydride ions can move with high mobility. As a result of the improved fast diffusion of hydrogen in magnesium hydride with fluorite structure, the magnesium hydride can very easy be charged and discharged with hydrogen at room temperature.

25 Although the invention has been described with reference to an example and embodiment, it is to be understood that it is clearly not intended to limit the invention to this example and embodiment. On the contrary, the present invention is intended to cover all alternatives and modifications that may be included within the spirit and scope of the invention as described by the claims.

CLAIMS:

1. A hydrogen storage material comprising magnesium hydride, in which the magnesium hydride is stabilized in the fluorite structure.
2. A hydrogen storage material according to claim 1, characterized in that the magnesium is at least partially substituted by an element such that the magnesium hydride is stabilized in the fluorite structure.
3. A hydrogen storage material as claimed in claim 2, characterized in that the element comprises an ion with a size that is similar to the size of Mg^{2+} in a VIII coordination.
4. A hydrogen storage material as claimed in claim 2, characterized in that the element comprises an ion with a radius in the range of 0.090-1.120 nm.
5. A hydrogen storage material as claimed in claim 2, characterized in that the element comprises an ion selected from the group comprising Sc^{3+} , RE^{3+} (Rare Earth elements), Y^{3+} , Li^{+} , Zn^{2+} , Co^{2+} , Fe^{2+} , Mn^{2+} , In^{3+} , Zr^{4+} , and Hf^{4+} .
6. A hydrogen storage material as claimed in one or more of the preceding claims, characterized in that it comprises an amount of a catalytically active material.
7. A hydrogen storage material as claimed in one or more of the preceding claims, characterized in that the catalytically active material comprises at least one metal selected from the group consisting of Ir, Ni, Pd, Pt, Rh and Ru.
8. A hydrogen storage material as claimed in one or more of the preceding claims, characterized in that the catalytically active material comprises palladium or rhodium.
9. An electrochemically active material, characterized in that the material comprises a hydrogen storage material as claimed in one or more of the claims 1 to 8.

10. An electrochemical cell at least comprising a positive electrode and a negative electrode, characterized in that the negative electrode comprises a hydrogen storage material as claimed in one or more of the claims 1 to 8.

5

11. Electronic equipment powered by at least one electrochemical cell, characterized in that the at least one electrochemical cell is an electrochemical cell as claimed in claim 10.

ABSTRACT:

Disclosed is a hydrogen storage material comprising a magnesium hydride. Said magnesium is stabilized in the fluorite structure. Preferably, the magnesium is at least partially substituted by an element such that the magnesium hydride is stabilized in the fluorite structure. In an advantageous embodiment, the hydrogen storage material also
5 comprises a catalytically active material.

Furthermore, an electrochemically active material, as well as an electrochemical cell comprising the above hydrogen storage material are disclosed.

Fig. 1b

1/1

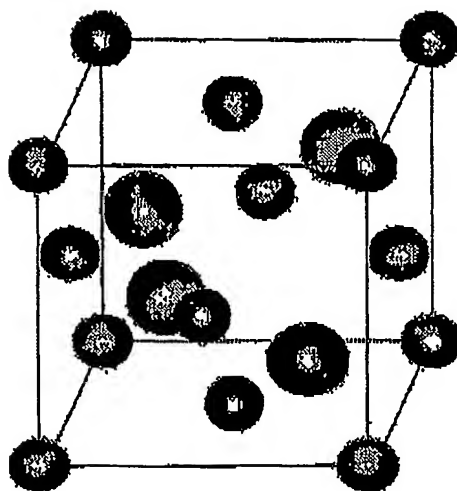


FIG.1a

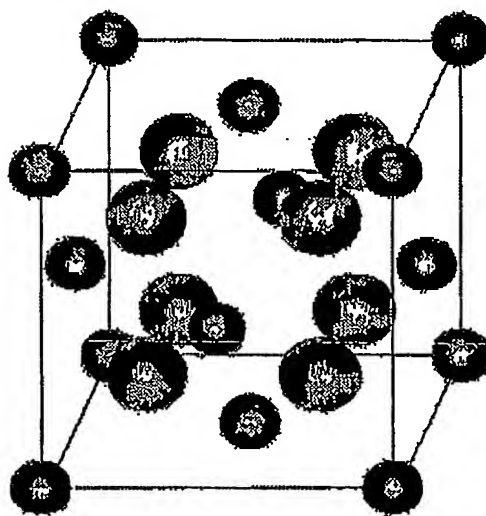


FIG.1b